

## Regenerative Power Electronic Solutions





# A combination of knowledge, experience and passion for what we do.

CINERGIA is the result of more than ten years of experience in the conception, design, production and service of customized power electronics solutions. Our key areas of expertise include power electronics, DSP-based digital control of converters, communications and software user interface (HMI).

#### **Power Electronics Specialized**

The origins of the founding team are in a University R&D center where we developed custom-made power converters for third party companies under a technology transfer framework. We then acquired knowledge and experience in power electronics for different types of applications.

#### Founded on 2008

CINERGIA's beginnings focused on providing engineering services and customized power electronics solutions. 2014 was an important date for two reasons: we launched the standard product catalogue and the first distributors commercializing it were assigned. The new **ePlus** control platform provides better performance, as well as more modularity through master/slave connections.

#### Industrial partnership

Our Barcelona based partnership with an important online UPS manufacturer, both at an industrial and R&D level, allows CINERGIA to offer regenerative products that combine the robustness and competitiveness of a UPS with the features and flexibility of an in-house control platform.

#### Quality policy

Providing high quality solutions is a priority in CINERGIA and our activities of Design and Production of Power Supplies have been certified with the ISO 9001:2015, the world's most recognised quality management standard.

Our commitment is to continuously improve the internal processes to increase customer satisfaction and complying with all legal and regulatory requirements for our activity.

### **L**

More than 18MW of our units supplied worldwide

### Products all over the world

#### Distributors

UK, Germany, Netherlands, Belgium, Luxembourg, Spain, Portugal, France, Italy, Sweden, Norway, Denmark, Filanda, Austria, Switzerland, Poland, Czech Republic, Slovakia and Hungary, USA, China, Israel, India and Singapore.

Contact us if you want to distribute our products.



## Better than ever, the enhanced Plus family





#### What's better

#### MASTER/SLAVE CONNECTION

by using a fiber optics link to increase power/voltage capabilities: GE in AC: can be connected in parallel

GE in AC: can be connected in parallel EL in AC: can be connected in parallel B2C: can be connected in parallel, or series or both

#### **FASTER**

30kHz control loop frequency

#### MORE HARMONICS

50 per phase with 20 free-harmonics

#### **DELTA LOAD**

for the EL in AC mode

#### **ADJUSTABLE DC TRANSIENT**

controllers to improve stability of the system

#### **OPTIMIZED RMS CALCULATION**

for PV inverters anti-islanding test

#### SAME ELECTRICAL RATINGS and SAME BANDWIDTH

because the power platform does not change so robustness and ratings remain the same.




**cinergia** cinergia.coop





#### **Isolated Transformers**

In all DC configurations, it is necessary to use isolation transformers at the input of the device to guarantee the safety of the system.

## Three different Master/Slave connection possibilities

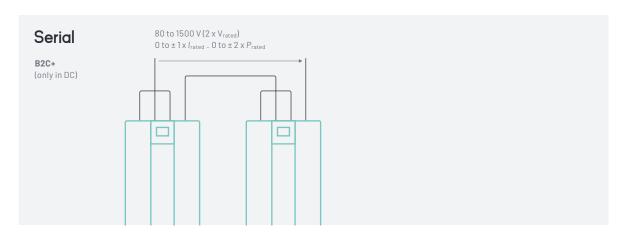

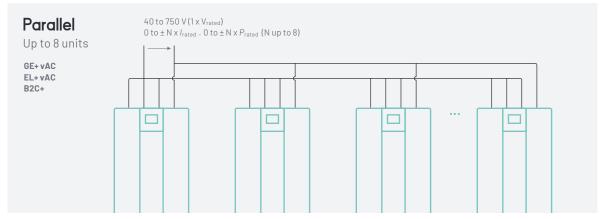


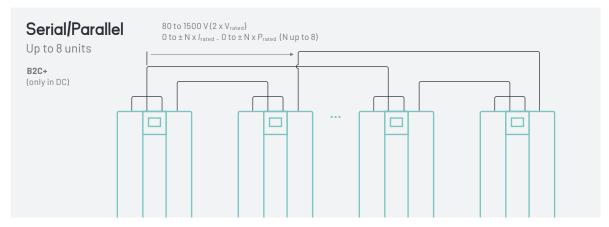


## Regenerative converters for your test needs

#### **APPLICATIONS**

We offer a comprehensive range of AC and DC regenerative power converters for Testing and R&D applications. CINERGIA's products are improved from the experience gained by applying our technology in different fields and working closely with our customers.

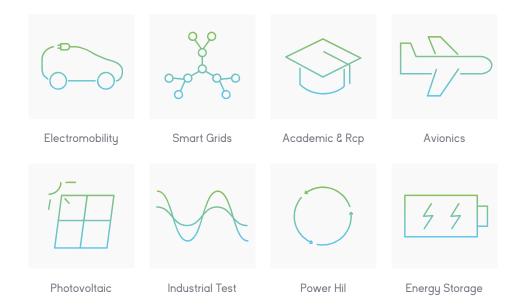

#### Electromobility

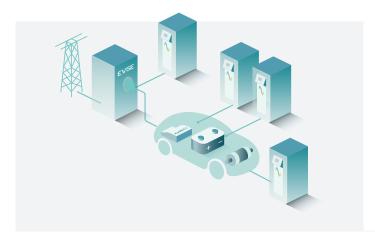

Mobility is one of the main challenges of the 21st century. Environmental concern is driving a growing demand for more efficient and clean means of transportation. The advances in the field of electromobility are mostly linked to the development of battery technology and power electronics for charging, discharging and driving the electrical motors.

Scan the OR code to visit the application website  $\rightarrow$ 




Products for this application

EL+ vAC/DC Full **Battery Emulation Battery Pack Tester** B2C+ GE+vAC GE+ vAC/DC Full GE&EL+ vAC/DC GE&EL+ vAC





#### Smart Grids

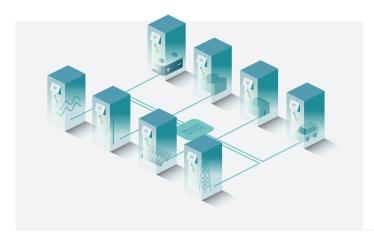

The electrical grid is in a transformation process that will affect the production, storage, consumption and commercialization of energy. Smartgrids need power electronics and ICT to manage energy flows and ensure the quality and continuity of the electricity supply. This will allow us to know in real time the consumption and thus learn about our consumption habits, how to improve the efficiency of the grid and how to contribute to the energy saving.




Products for this application

EL+ vAC EL+ vAC/DC Full **Battery Emulation** B2C+ GE+vAC GE+ vAC/DC Full GE&EL+ vAC/DC GE&EL+ vAC





#### Academic & RCP

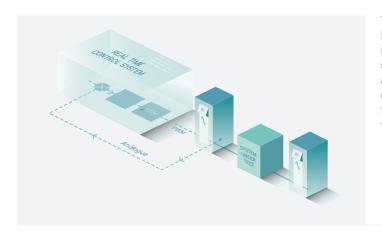

The origins of CINERGIA's founding team is in a research and development center in the university so we understand the specific needs of Academic and Research applications. In addition to our standard catalogue of products we are able to adapt them to fit the particular requirements these applications.




Products for this application

EL+ vHiL EL+ vAC/DC Full B2C+ GE+ vHiL GE+ vAC/DC Full GE&EL+ vAC/DC GE&EL+ vAC



#### Avionics

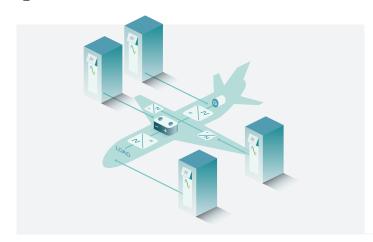

More electric and all-electric aircraft projects along with variable frequency generation systems are driving new developments and new test needs in the fields of avionics. CINERGIA offers a unique Regenerative AC Electronic Load (EL+ vHF) designed to work in a frequency range of 360 to 900Hz used mainly in aircraft generator's testing platforms.




Products for this application

EL+ vHF/DC EL+ vHF/AC EL+ vHF EL+ vAC EL+ vAC/DC Full B2C+ GE&EL+ vAC/DC GE&EL+ vAC



#### Photovoltaic

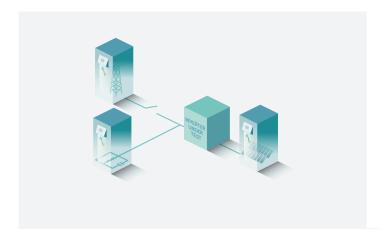

CINERGIA can provide all necessary power devices for PV Inverter testing in a closed energy loop. In such a platform the total power and energy consumption from the grid will be reduced down to the losses of the power converters involved in the test, typically in the range of 20 to 35% of the power generated by the Inverter under test. In R&D, the main advantage will be the reduction of power needed: a 100kW Inverter could be tested in a laboratory with 20 to 35kW installation.




Products for this application

EL+ vAC/DC Full PV Panel Emulation B2C+ GE+vAC GE+ vAC/DC Full GE&EL+ vAC/DC GE&EL+ vAC



#### **√** Industrial Test

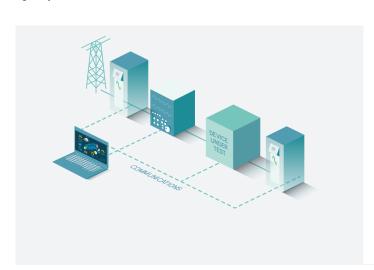

CINERGIA devices have been carefully designed to be part of manual and automated test benches for functional and quality testing as well as research and development of new products. Integrating our devices in test platforms is simple by means of the MODBUS/TCP protocol used (other field buses are offered as an option) and the comprehensive documentation provided of the communication protocol. Labview drivers are supplied with each one of the equipment along with an open source Labview project that will allow a quick start.




Products for this application

EL+ vAC
EL+ vAC/DC Full
B2C+
GE+vAC
GE+ vAC/DC Full
GE&EL+ vAC/DC
GE&EL+ vAC/DC



cinergia cinergia.coop

#### Power HiL

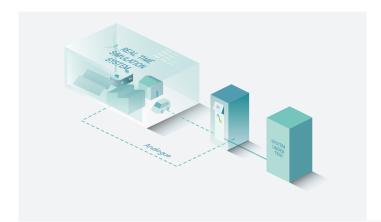

Real Time Simulation and Power
Converters are converging into the field
known as Power Hardware in the Loop
(PHiL). In these kind of applications, a real
world system is simulated on a real-time
basis and then emulated: converted in real
voltage, current and power. This emulation
is performed by a power converter that
transforms the reference signal generated
by the real time simulator into a voltage
or current waveform. A power converter
used in such a way is generally known as a
power amplifier.




Products for this application

EL+ vHiL EL+ vAC/DC Full B2C+ GE+ vHiL GE+ vAC/DC Full GE&EL+ vAC/DC GE&EL+ vAC



#### **Energy Storage System**

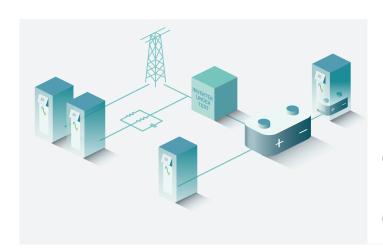

Electricity has been traditionally produced and consumed at the same time, but the appearance of new battery technologies and the optimisation of existing technologies as fuel cells and flywheel systems is changing this paradigm. Electrical Energy can be now stored cost-effectively and this will have a strong impact in the electrical system (smoothing the intermittency of renewable energies, storing excess of production, shifting peaks of consumption, increasing the efficiency, etc...) and in transportation (cars, trucks, buses, aircraft, ships, ...).



Products for this application


Battery Emulation Battery Pack Tester B2C+ GE+ vAC/DC Full GE&EL+ vAC/DC GE&EL+ vAC



## Product Overview

#### **PRODUCTS**

CINERGIA offers a wide range of products specially designed for testing, perfectly suitable for most applications in the field of Renewable Energy, Smartgrids and ESS, PV Panel Emulation and PV Inverter Testing, Anti-islanding, Power HiL, IEC Testing, Battery and Electric Vehicle Testing. Our product catalogue is unique for the flexibility and versatility of our units. Three main functions are the base of our catalogue: grid simulator (regenerative 40 AC voltage source), AC electronic load (regenerative 40 AC current source) and DC Sink/Source (regenerative 20/40 DC bidirectional sink/source). Each CINERGIA product will include one, two or the three main functions providing a high versatility.

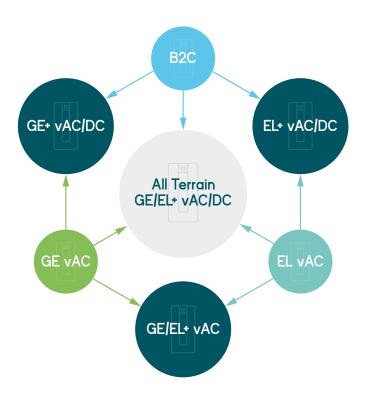



cinergia

## Two functionalities in one cabinet





## All in one GE&EL+ vAC

#### Grid Simulator + Electronic Load

The GE&EL product family is the aggregation of Grid Simulators, Electronic Loads.

**AC Power** 7.5 kW - 160 kW

DC Power

If you need a product with DC features, please check **GE&EL+ vAC/DC**.

AC Current (per phase) 11 A - 232 A

DC Current (per phase/parallel)
If you need a product with DC features,
please check GE&EL+ vAC/DC.

**Key Features** 

Bidirectional and Regenerative

Clean grid current: THDi < 3% and PF > 0.98

Parallelization of units to increase the power

The most flexible testing equipment in a single cabinet





#### GE+ vAC/DC Full

#### **Grid Simulator**

Grid Simulators are power electronic devices that emulate AC and DC electrical grids in both normal and disturbed conditions.

**AC Power** 7.5 kW - 160 kW

**DC Power** 7.5 kW - 160 kW

AC Current (per phase) 11 A - 232 A

DC Current (per phase/parallel)  $\pm 10 \text{ A} / \pm 30 \text{ A} - \pm 185 \text{ A} / \pm 555 \text{ A}$ 

**Kev Features** 

Bidirectional and Regenerative

Clean grid current: THDi < 3%and PF > 0.98

Same power in DC and AC

Parallelization of units to increase the power





#### EL+ vAC/DC Full

#### Electronic Load

The EL+ family is power electronic device designed to emulate AC and DC electrical loads.

AC Power

7.5 kW - 160 kW

**DC Power** 

7.5 kW - 160 kW

AC Current (per phase)

11 A - 232 A

DC Current (per phase/parallel)

 $\pm 10~A$  /  $\pm 30~A$  -  $\pm 185~A$  /  $\pm 555~A$ 

**Kev Features** 

Bidirectional and Regenerative

Clean grid current: THDi < 3% and PF > 0.98

Same power in DC and AC

Parallelization of units to increase the power

## Single function optimized





#### GE+ vAC

#### **Grid Simulator**

Grid Simulators are power electronic devices that emulate AC electrical grids in both normal and disturbed conditions.

**AC Power** 7.5 kW - 160 kW

#### **DC** Power

If you need a product with DC features, please check **GE+ vAC/DC Full**.

AC Current (per phase)

11 A - 232 A

DC Current (per phase/parallel)
If you need a product with DC features,
please check GE+ vAC/DC Full.

**Key Features** 

Bidirectional and Regenerative

Clean grid current: THDi < 3% and PF > 0.98

Parallelization of units to increase the power





#### EL+ vAC

#### Electronic Load

The EL+ family is power electronic device designed to emulate AC electrical loads.

**AC Power** 7.5 kW - 160 kW

**DC** Power

If you need a product with DC features, please check **EL+ vAC/DC Full**.

AC Current (per phase)

11 A - 232 A

DC Current (per phase/parallel)
If you need a product with DC features,
please check EL+ vAC/DC Full.

**Key Features** 

Bidirectional and Regenerative

Clean grid current: THDi < 3% and PF > 0.98

Parallelization of units to increase the power





#### **B2C+**

## Bidirectional DC Converter

CINERGIA'S DC Programmable Power Supplies are designed to generate a controlled DC source or load.

#### **Models**

Battery Pack Tester Battery Emulation PV Panel Emulation

**AC Power** 

If you need a product with DC features, please check  $\mathbf{AC/DC}$  models.

**DC Power** 

7.5 kW - 160 kW

DC Voltage (normal range/HV option) 10V-750V/800V - 20V-750V/800V

DC Current (independent /parallel)

±10 A / ±30 A - ±185 A / ±555 A

**Key Features** 

Bidirectional and Regenerative

20 and 40 configuration

Clean grid current:

THDi < 3% and PF > 0.98

Selialitzation of units to increase voltage up to 1500 V

Parallelization of units to increase the power

## Optimized for Avionics and PHiL applications









#### **Avionics**

#### High Frequency

Regenerative Electronic Load products capable of working in a frequency range of 360 to 900Hz. Designed to simulate the different loads that can be found in the aircraft.

Models

EL+ vHF/DC EL+ vHF/AC EL+ vHF

AC Power 7.5kW - 160kW

**DC Power\*** 7.5kW - 160kW

AC Current (per phase) 11A - 232A

DC Current (per phase/parallel)\* ±10A / ±30A - ±185A / ±555A

#### **Key Features**

Bidirectional and Regenerative Clean grid current: THDi < 3% and PF > 0.98 Same power in DC and AC

Parallelization of units to increase the power
The most flexible testing equipment in a single cabinet

\*Only in models with DC functionality

#### **PHiL**

#### Power HiL

Optimized in performance and price for Power Hardware in the Loop applications. This version includes Power Amplifier functions to connect with Real-Time Control Systems.

#### Models

EL+ vHiL GE+ vHiL

**AC Power** 

7.5kW - 160kW

**DC Power** 

7.5kW - 160kW

AC Current (per phase)

11A - 232A

DC Current (per phase/parallel)

±10A / ±30A - ±185A / ±555A

#### **Key Features**

Bidirectional and Regenerative Clean grid current: THDi < 3% and PF > 0.98 Same power in DC and AC

Parallelization of units to increase the power
The most flexible testing equipment in a single cabinet



#### MODELS

Reference	AC Power Rated (9)	AC Current Rated (9) RMS 3 chanels / 1 chanel	DC Power Rated (9)	DC Current  Rated (9) RMS 3 chanels / 1 chanel	Weight	<b>Dimensions</b>
GE&EL+		3 Chanels / 1 Chanel		3 chaners / Tchaner		
GE&EL+ vAC/DC	AC Power	AC Current	DC Power	DC Current	Weight	Dimensions
GE&EL+7.5 vAC/DC	7.5 kW	11 A / 33 A	7.5 kW	±10A / ±30A	155 kg	770 x 450 x 1100 mm
GE&EL+10 vAC/DC	10 kW	15 A / 45 A	10 kW	±15A / ±45A	155 kg	770 x 450 x 1100 mm
GE&EL+15 vAC/DC	15 kW	22 A / 66 A	15 kW	±20A / ±60A	155 kg	770 x 450 x 1100 mm
GE&EL+20 vAC/DC	20 kW	29 A / 87 A	20 kW	±25A / ±75A	155 kg	770 x 450 x 1100 mm
GE&EL+30 vAC/DC	27 kW	40 A / 120 A	27 kW	±30A/±90A	155 kg	770 x 450 x 1100 mm
GE&EL+40 vAC/DC	40 kW	58 A / 174 A	40 kW	±40A / ±120A	190 kg	770 x 450 x 1100 mm
GE&EL+50 vAC/DC	50 kW	73 A / 219 A	50 kW	±50A / ±150A	190 kg	770 x 450 x 1100 mm
GE&EL+60 vAC/DC	54 kW	80 A / 240 A	54 kW	±57A / ±171A	190 kg	770 x 450 x 1100 mm
GE&EL+80 vAC/DC	80 kW	116 A / -	80 kW	±105A / ±315A	270 kg	880 x 875 x 1320 mm
GE&EL+100 vAC/DC	100 kW	145 A / -	100 kW	±130A / ±390A	295 kg	880 x 875 x 1320 mm
GE&EL+120 vAC/DC	108 kW	157 A / -	108 kW	±130A / ±390A	295 kg	880 x 875 x 1320 mm
GE&EL+160 vAC/DC	145 kW	211 A / -	145 kW	±155A / ±465A	545 kg	850 x 900 x 2000 mm
GE&EL+200 vAC/DC	160 kW	232 A / -	160 kW	±185A / ±555A	555 kg	850 x 900 x 2000 mm
GE&EL+ vAC	AC Power	AC Current	-	-	Weight	Dimensions
GE&EL+7.5 vAC	7.5 kW	11 A / 33 A	-	-	155 kg	770 x 450 x 1100 mm
GE&EL+10 vAC	10 kW	15 A / 45 A	-	-	155 kg	770 x 450 x 1100 mm
GE&EL+15 vAC	15 kW	22 A / 66 A	-	-	155 kg	770 x 450 x 1100 mm
GE&EL+20 vAC	20 kW	29 A / 87 A	-	-	155 kg	770 x 450 x 1100 mm
GE&EL+30 vAC	27 kW	40 A / 120 A	-	-	155 kg	770 x 450 x 1100 mm
GE&EL+40 vAC	40 kW	58 A / 174 A	-	-	190 kg	770 x 450 x 1100 mm
GE&EL+50 vAC	50 kW	73 A / 219 A	-	-	190 kg	770 x 450 x 1100 mm
GE&EL+60 vAC	54 kW	80 A / 240 A	-	-	190 kg	770 x 450 x 1100 mm
GE&EL+80 vAC	80 kW	116 A / -	-	-	270 kg	880 x 875 x 1320 mm
GE&EL+100 vAC	100 kW	145 A / -	-	-	295 kg	880 x 875 x 1320 mm
GE&EL+120 vAC	108 kW	157 A / -	-	-	295 kg	880 x 875 x 1320 mm
GE&EL+160 vAC	145 kW	211 A / -	-	-	545 kg	850 x 900 x 2000 mm
GE&EL+200 vAC	160 kW	232 A / -	-	-	555 kg	850 x 900 x 2000 mm
GE+						
GE+ vAC/DC Full	AC Power	AC Current	DC Power	DC Current	Weight	Dimensions
GE+7.5 vAC/DC	7.5 kW	11 A / 33 A	7.5 kW	±10A / ±30A	155 kg	770 x 450 x 1100 mm
GE+10 vAC/DC	10 kW	15 A / 45 A	10 kW	±15A / ±45A	155 kg	770 x 450 x 1100 mm
GE+15 vAC/DC	15 kW	22 A / 66 A	15 kW	±20A/±60A	155 kg	770 x 450 x 1100 mm
GE+20 vAC/DC	20 kW	29 A / 87 A	20 kW	±25A / ±75A	155 kg	770 x 450 x 1100 mm
GE+30 vAC/DC	27 kW	40 A / 120 A	27 kW	±30A/±90A	155 kg	770 x 450 x 1100 mm
GE+40 vAC/DC	40 kW	58 A / 174 A	40 kW	±40A / ±120A	190 kg	770 x 450 x 1100 mm
GE+50 vAC/DC	50 kW	73 A / 219 A	50 kW	±50A / ±150A	190 kg	770 x 450 x 1100 mm
GE+60 vAC/DC	54 kW	80 A / 240 A	54 kW	±57A / ±171A	190 kg	770 x 450 x 1100 mm
GE+80 vAC/DC	80 kW	116 A / -	80 kW	±105A / ±315A	270 kg	880 x 875 x 1320 mm
GE+100 vAC/DC	100 kW	145 A / -	100 kW	±130A / ±390A	295 kg	880 x 875 x 1320 mm
GE+120 vAC/DC	108 kW	157 A / -	108 kW	±130A / ±390A	295 kg	880 x 875 x 1320 mm
GE+160 vAC/DC	145 kW	211 A / -	145 kW	±155A / ±465A	545 kg	850 x 900 x 2000 mm
OF.000A0/D0	100114	070 4 /	100114/	.1054 / .5554	EEE.	000 000 0000

 $<sup>{}^*\!\</sup>mathsf{AII}\,\mathsf{specifi}\,\mathsf{cations}\,\mathsf{are}\,\mathsf{subject}\,\mathsf{to}\,\mathsf{change}\,\mathsf{without}\,\mathsf{notice}.$ 

160 kW

232 A /

GE+200 vAC/DC

**cinergia** cinergia.coop

160 kW

±185A / ±555A

555 kg

850 x 900 x 2000 mm



Reference	AC Power Rated (9)	AC Current Rated (9) RMS 3 chanels / 1 chanel	DC Power Rated (9)	DC Current Rated ® RMS 3 chanels / 1 chanel	Weight	<b>Dimensions</b> DxWxH
GE+ vAC	AC Power	AC Current	-	-	Weight	Dimensions
GE+7.5 vAC	7.5 kW	11 A / 33 A	-	-	155 kg	770 x 450 x 1100 mm
GE+10 vAC	10 kW	15 A / 45 A	-	-	155 kg	770 x 450 x 1100 mm
GE+15 vAC	15 kW	22 A / 66 A	-	-	155 kg	770 x 450 x 1100 mm
GE+20 vAC	20 kW	29 A / 87 A	-	-	155 kg	770 x 450 x 1100 mm
GE+30 vAC	27 kW	40 A / 120 A	-	-	155 kg	770 x 450 x 1100 mm
GE+40 vAC	40 kW	58 A / 174 A	-	-	190 kg	770 x 450 x 1100 mm
GE+50 vAC	50 kW	73 A / 219 A	-	-	190 kg	770 x 450 x 1100 mm
GE+60 vAC	54 kW	80 A / 240 A	-	-	190 kg	770 x 450 x 1100 mm
GE+80 vAC	80 kW	116 A / -	-	-	270 kg	880 x 875 x 1320 mm
GE+100 vAC	100 kW	145 A / -	-	-	295 kg	880 x 875 x 1320 mm
GE+120 vAC	108 kW	157 A / -	-	-	295 kg	880 x 875 x 1320 mm
GE+160 vAC	145 kW	211 A / -	-	-	545 kg	850 x 900 x 2000 mm
GE+200 vAC	160 kW	232 A / -	-	-	555 kg	850 x 900 x 2000 mm

#### EL+

EL+ vAC/DC Full	AC Power	AC Current	DC Power	DC Current	Weight	Dimensions
EL+7.5 vAC/DC	7.5 kW	11 A / 33 A	7.5 kW	±10A / ±30A	155 kg	770 x 450 x 1100 mm
EL+10 vAC/DC	10 kW	15 A / 45 A	10 kW	±15A / ±45A	155 kg	770 x 450 x 1100 mm
EL+15 vAC/DC	15 kW	22 A / 66 A	15 kW	±20A / ±60A	155 kg	770 x 450 x 1100 mm
EL+20 vAC/DC	20 kW	29 A / 87 A	20 kW	±25A / ±75A	155 kg	770 x 450 x 1100 mm
EL+30 vAC/DC	27 kW	40 A / 120 A	27 kW	±30A/±90A	155 kg	770 x 450 x 1100 mm
EL+40 vAC/DC	40 kW	58 A / 174 A	40 kW	±40A/±120A	190 kg	770 x 450 x 1100 mm
EL+50 vAC/DC	50 kW	73 A / 219 A	50 kW	±50A / ±150A	190 kg	770 x 450 x 1100 mm
EL+60 vAC/DC	54 kW	80 A / 240 A	54 kW	±57A / ±171A	190 kg	770 x 450 x 1100 mm
EL+80 vAC/DC	80 kW	116 A / -	80 kW	±105A / ±315A	270 kg	880 x 875 x 1320 mm
EL+100 vAC/DC	100 kW	145 A / -	100 kW	±130A / ±390A	295 kg	880 x 875 x 1320 mm
EL+120 vAC/DC	108 kW	157 A / -	108 kW	±130A / ±390A	295 kg	880 x 875 x 1320 mm
EL+160 vAC/DC	145 kW	211 A / -	145 kW	±155A / ±465A	545 kg	850 x 900 x 2000 mm
EL+200 vAC/DC	160 kW	232 A / -	160 kW	±185A / ±555A	555 kg	850 x 900 x 2000 mm
EL+ vAC	AC Power	AC Current	-	-	Weight	Dimensions

EL+ vAC	AC Power	AC Current				Dimensions
EL+7.5 vAC	7.5 kW	11 A / 33 A	-	-	155 kg	770 x 450 x 1100 mm
EL+10 vAC	10 kW	15 A / 45 A	-	-	155 kg	770 x 450 x 1100 mm
EL+15 vAC	15 kW	22 A / 66 A	-	-	155 kg	770 x 450 x 1100 mm
EL+20 vAC	20 kW	29 A / 87 A	-	-	155 kg	770 x 450 x 1100 mm
EL+30 vAC	27 kW	40 A / 120 A	-	-	155 kg	770 x 450 x 1100 mm
EL+40 vAC	40 kW	58 A / 174 A	-	-	190 kg	770 x 450 x 1100 mm
EL+50 vAC	50 kW	73 A / 219 A	-	-	190 kg	770 x 450 x 1100 mm
EL+60 vAC	54 kW	80 A / 240 A	-	-	190 kg	770 x 450 x 1100 mm
EL+80 vAC	80 kW	116 A / -	-	-	270 kg	880 x 875 x 1320 mm
EL+100 vAC	100 kW	145 A / -	-	-	295 kg	880 x 875 x 1320 mm
EL+120 vAC	108 kW	157 A / -	-	-	295 kg	880 x 875 x 1320 mm
EL+160 vAC	145 kW	211 A / -	-	-	545 kg	850 x 900 x 2000 mm
EL+200 vAC	160 kW	232 A / -	-	-	555 kg	850 x 900 x 2000 mm

 $<sup>{}^*\!\</sup>mathsf{All}\,\mathsf{specifi}\,\mathsf{cations}\,\mathsf{are}\,\mathsf{subject}\,\mathsf{to}\,\mathsf{change}\,\mathsf{without}\,\mathsf{notice}.$ 

#### MODELS

Reference B2C+	DC Power Rated (9)	<b>DC Voltage</b> Normal Range / HV option	DC Current Rated 3 chanels Unipolar Mode	DC Current Rated 1 chanel Unipolar Mode	DC Current  Rated +/0/- Bipolar 40 Mode	Weight	<b>Dimensions</b> D×W×H
B2C+	DC Power	DC Voltage	DC Current	DC Current	DC Current	Weight	Dimensions
B2C+7.5	7.5 kW	10-750 / 800 V	±10 A	±30 A	±10 A	155 kg	770 x 450 x 1100 mm
B2C+10	10 kW	10-750 / 800 V	±15 A	±45 A	±15 A	155 kg	770 x 450 x 1100 mm
B2C+15	15 kW	10-750 / 800 V	±20 A	±60 A	±20 A	155 kg	770 x 450 x 1100 mm
B2C+20	20 kW	10-750 / 800 V	±25 A	±75 A	±25 A	155 kg	770 x 450 x 1100 mm
B2C+30	27 kW	10-750 / 800 V	±30 A	±90 A	±30 A	155 kg	770 x 450 x 1100 mm
B2C+40	40 kW	10-750 / 800 V	±40 A	±120 A	±40 A	190 kg	770 x 450 x 1100 mm
B2C+50	50 kW	10-750 / 800 V	±50 A	±150 A	±50 A	190 kg	770 x 450 x 1100 mm
B2C+60	54 kW	10-750 / 800 V	±57 A	±170 A	±57 A	190 kg	770 x 450 x 1100 mm
B2C+80	80 kW	20-750 / 800 V	±105 A	±315 A	±105 A	270 kg	880 x 875 x 1320 mm
B2C+100	100 kW	20-750 / 800 V	±130 A	±390 A	±130 A	295 kg	880 x 875 x 1320 mm
B2C+120	108 kW	20-750 / 800 V	±130 A	±390 A	±130 A	295 kg	880 x 875 x 1320 mm
B2C+160	145 kW	20-750 / 800 V	±155 A	±465 A	±155 A	545 kg	850 x 900 x 2000 mm
B2C+200	160 kW	20-750 / 800 V	±185 A	±555 A	±185 A	555 kg	850 x 900 x 2000 mm

<sup>\*</sup>All specifications are subject to change without notice.

Reference	AC Power Rated (a)	AC Current  Rated (8) RMS 3 chanels / 1 chanel	DC Power Rated (9)	DC Current  Rated (9) RMS 3 chanels / 1 chanel	Weight	<b>Dimensions</b>
Avionics						
EL+ vHF/DC	AC Power	AC Current	DC Power	DC Current	Weight	Dimensions
EL+15 vHF/DC	15 kW	20 A / 60 A	15 kW	±20 A / ±60 A	155 kg	770 x 450 x 1100 mm
EL+20 vHF/DC	20 kW	26 A / 78 A	20 kW	±25 A / ±75 A	155 kg	770 x 450 x 1100 mm
EL+30 vHF/DC	27 kW	40 A / 120 A	27 kW	±30 A / ±90 A	155 kg	770 x 450 x 1100 mm
EL+40 vHF/DC	40 kW	52 A / 156 A	40 kW	±40 A / ±120 A	190kg	770 x 450 x 1100 mm
EL+50 vHF/DC	50 kW	65 A / 195 A	50 kW	±50 A / ±150 A	190kg	770 x 450 x 1100 mm
EL+ vHF/AC	AC Power	AC Current	-	-	Weight	Dimensions
EL+15 vHF/AC	15 kW	20 A / 60 A	-	-	155 kg	770 x 450 x 1100 mm
EL+20 vHF/AC	20 kW	26 A / 78 A	-	-	155 kg	770 x 450 x 1100 mm
EL+30 vHF/AC	27 kW	40 A / 120 A	-	-	155 kg	770 x 450 x 1100 mm
EL+40 vHF/AC	40 kW	52 A / 156 A	-	-	190kg	770 x 450 x 1100 mm
EL+50 vHF/AC	50 kW	65 A / 195 A	-	-	190kg	770 x 450 x 1100 mm
EL+ vHF	AC Power	AC Current			Weight	Dimensions
EL+15 vHF	15 kW	20 A / 60 A	-	-	155 kg	770 x 450 x 1100 mm
EL+20 vHF	20 kW	26 A / 78 A	-	-	155 kg	770 x 450 x 1100 mm
EL+30 vHF	27 kW	40 A / 120 A	-	-	155 kg	770 x 450 x 1100 mm
EL+40 vHF	40 kW	52 A / 156 A	-	-	190kg	770 x 450 x 1100 mm
EL+50 vHF	50 kW	65 A / 195 A	-	-	190kg	770 x 450 x 1100 mm

 $<sup>^*\</sup>mbox{All}$  specifications are subject to change without notice.

**cinergia** cinergia.coop



Reference	AC Power	AC Current Rated (9) RMS	DC Power Rated (9)	DC Current Rated (9) RMS	Weight	<b>Dimensions</b>
PHiL		3 chanels / 1 chanel		3 chanels / 1 chanel		
EL+ vHiL	AC Power	AC Current	DC Power	DC Current	Weight	Dimensions
EL+7.5 vHiL	7.5 kW	11 A / 33 A	3.75 kW	±5 A / ±15 A	155 kg	770 x 450 x 1100 mm
EL+10 vHiL	10 kW	15 A / 45 A	5 kW	±7.5 A / ±22.5 A	155 kg	770 x 450 x 1100 mm
EL+15 vHiL	15 kW	22 A / 66 A	7.5 kW	±10 A / ±30 A	155 kg	770 x 450 x 1100 mm
EL+20 vHiL	20 kW	29 A / 87 A	10 kW	±12.5 A / ±37.5 A	155 kg	770 x 450 x 1100 mm
EL+30 vHiL	27 kW	40 A / 120 A	13.5 kW	±15 A / ±45 A	155 kg	770 x 450 x 1100 mm
EL+40 vHiL	40 kW	58 A / 174 A	20 kW	±20 A / ±60 A	190 kg	770 x 450 x 1100 mm
EL+50 vHiL	50 kW	73 A / 219 A	25 kW	±25 A / ±75 A	190 kg	770 x 450 x 1100 mm
EL+60 vHiL	54 kW	80 A / 240 A	27 kW	±28.5 A / ±85.5 A	190 kg	770 x 450 x 1100 mm
EL+80 vHiL	80 kW	116 A / -	40 kW	±52.5 A / ±157.5 A	270 kg	880 x 875 x 1320 mm
EL+100 vHiL	100 kW	145 A / -	50 kW	±65 A / ±195 A	295 kg	880 x 875 x 1320 mm
EL+120 vHiL	108 kW	157 A / -	54 kW	±65 A / ±195 A	295 kg	880 x 875 x 1320 mm
EL+160 vHiL	145 kW	211 A / -	72.5 kW	±77.5 A / ±232.5 A	545 kg	850 x 900 x 2000 mm
EL+200 vHiL	160 kW	232 A / -	80 kW	±92.5 A / ±277.5 A	555 kg	850 x 900 x 2000 mm
GE+ vHiL	AC Power	AC Current	DC Power	DC Current	Weight	Dimensions
GE+7.5 vHiL	7.5 kW	11 A / 33 A	3.75 kW	±5 A / ±15 A	155 kg	770 x 450 x 1100 mm
GE+10 vHiL	10 kW	15 A / 45 A	5 kW	±7.5 A / ±22.5 A	155 kg	770 x 450 x 1100 mm
GE+15 vHiL	15 kW	22 A / 66 A	7.5 kW	±10 A / ±30 A	155 kg	770 x 450 x 1100 mm
GE+20 vHiL	20 kW	29 A / 87 A	10 kW	±12.5 A / ±37.5 A	155 kg	770 x 450 x 1100 mm
GE+30 vHiL	27 kW	40 A / 120 A	13.5 kW	±15 A / ±45 A	155 kg	770 x 450 x 1100 mm
GE+40 vHiL	40 kW	58 A / 174 A	20 kW	±20 A / ±60 A	190 kg	770 x 450 x 1100 mm
GE+50 vHiL	50 kW	73 A / 219 A	25 kW	±25 A / ±75 A	190 kg	770 x 450 x 1100 mm
GE+60 vHiL	54 kW	80 A / 240 A	27 kW	±28.5 A / ±85.5 A	190 kg	770 x 450 x 1100 mm
GE+80 vHiL	80 kW	116 A / -	40 kW	±52.5 A / ±157.5 A	270 kg	880 x 875 x 1320 mm
GE+100 vHiL	100 kW	145 A / -	50 kW	±65 A / ±195 A	295 kg	880 x 875 x 1320 mm
GE+120 vHiL	108 kW	157 A / -	54 kW	±65 A / ±195 A	295 kg	880 x 875 x 1320 mm
GE+160 vHiL	145 kW	211 A / -	72.5 kW	±77.5 A / ±232.5 A	545 kg	850 x 900 x 2000 mm
GE+200 vHiL	160 kW	232 A / -	80 kW	±92.5 A / ±277.5 A	555 kg	850 x 900 x 2000 mm

<sup>\*</sup>All specifications are subject to change without notice.

#### Galvanic Isolation (optional)

INSIDE THE CABINET	Circuit Breaker Recommended	Weight	IN EXTERNAL CABINET IP20	Circuit Breaker Recommended	Weight	<b>Dimensions</b> DxWxH
IT 7.1i	Type C - 25 A	145 kg	IT 30e	Type D - 80 A	174 kg	595 x 415 x 708 mm
IT 10i	Type C - 25 A	145 kg	IT 40e	Type D - 100 A	217 kg	725 x 525 x 773 mm
IT 15i	Type C - 32 A	145 kg	IT 50e	Type D - 125 A	280 kg	725 x 525 x 773 mm
IT 20i	Type C - 40 A	145 kg	IT 60e	Type D - 160 A	381 kg	875 x 600 x 900 mm
IT 30i	Type C - 50 A	195 kg	IT 80e	Type D - 200 A	435 kg	875 x 600 x 900 mm
IT 40i*	Type C - 63 A	195 kg	IT 100e	Type D - 250 A	458 kg	875 x 600 x 900 mm
IT 50i*	Type C - 83 A	195 kg	IT 120e	Type D - 315 A	514 kg	875 x 600 x 900 mm
*In the IT 40i and IT 50	i models the size of the cabing	at increases to	IT 160e	Type D - 400 A	612 kg	964 x 648 x 1252 mm
	100 mm. The others keep the o		IT 200e	Type D - 500 A	753 kg	1192 x 744 x 1430 mm

## Friendly interface

#### **SOFTWARE**

The user interface used by CINERGIA devices has been developed by our R&D team, to offer total control of the device, with a comfortable and intuitive design. This allows us to take full advantage of the capabilities of the device, as well as the programming and execution of standardized or self-created tests.



#### Remote Control port

- ~ LAN Ethernet with Modbus/TCP protocol.
- ~ Labview Drivers
- ~ RS485(optional)

#### Digital IO por

- ~ 4 digital inputs
- ~ 3 relay outputs
- ~ 1 emergency stop

#### Optional analogue port

- ~ 6 analogue input 0-10V
- ~ 6 analogue output 0-10V

Windows 7/10 user interface for remote operation and data acquisition.

## Features and capabilities

\*The software functions available on each product depends of its features.

#### ☐ AC Operation<sup>(1)</sup>

In AC, each phase can be independently configured: RMS current, phase delay, harmonics content, free-frequency harmonic and transition ramps. A plot shows the expected waveform, the theoretical FFT representatino, RMS, peak, CF and THD.

#### DC Operation

Access to all DC set points and limits. Thanks to Multichannel feature, each phase can have a different Operation Mode: voltage, current, power, resistance and advanced DC applications. Transition ramps, voltage and current limits can be modified. The limits for sink and source operation are different for safer testing.

# | Color-10/10001 | 12/1001 | 12/1001 | 12/1001 | 12/1001 | 12/1001 | 12/1001 | 12/1001 | 12/1001 | 12/1001 | 12/1001 | 12/1001 | 12/1001 | 12/1001 | 12/1001 | 12/1001 | 12/1001 | 12/1001 | 12/1001 | 12/1001 | 12/1001 | 12/1001 | 12/1001 | 12/1001 | 12/1001 | 12/1001 | 12/1001 | 12/1001 | 12/1001 | 12/1001 | 12/1001 | 12/1001 | 12/1001 | 12/1001 | 12/1001 | 12/1001 | 12/1001 | 12/1001 | 12/1001 | 12/1001 | 12/1001 | 12/1001 | 12/1001 | 12/1001 | 12/1001 | 12/1001 | 12/1001 | 12/1001 | 12/1001 | 12/1001 | 12/1001 | 12/1001 | 12/1001 | 12/1001 | 12/1001 | 12/1001 | 12/1001 | 12/1001 | 12/1001 | 12/1001 | 12/1001 | 12/1001 | 12/1001 | 12/1001 | 12/1001 | 12/1001 | 12/1001 | 12/1001 | 12/1001 | 12/1001 | 12/1001 | 12/1001 | 12/1001 | 12/1001 | 12/1001 | 12/1001 | 12/1001 | 12/1001 | 12/1001 | 12/1001 | 12/1001 | 12/1001 | 12/1001 | 12/1001 | 12/1001 | 12/1001 | 12/1001 | 12/1001 | 12/1001 | 12/1001 | 12/1001 | 12/1001 | 12/1001 | 12/1001 | 12/1001 | 12/1001 | 12/1001 | 12/1001 | 12/1001 | 12/1001 | 12/1001 | 12/1001 | 12/1001 | 12/1001 | 12/1001 | 12/1001 | 12/1001 | 12/1001 | 12/1001 | 12/1001 | 12/1001 | 12/1001 | 12/1001 | 12/1001 | 12/1001 | 12/1001 | 12/1001 | 12/1001 | 12/1001 | 12/1001 | 12/1001 | 12/1001 | 12/1001 | 12/1001 | 12/1001 | 12/1001 | 12/1001 | 12/1001 | 12/1001 | 12/1001 | 12/1001 | 12/1001 | 12/1001 | 12/1001 | 12/1001 | 12/1001 | 12/1001 | 12/1001 | 12/1001 | 12/1001 | 12/1001 | 12/1001 | 12/1001 | 12/1001 | 12/1001 | 12/1001 | 12/1001 | 12/1001 | 12/1001 | 12/1001 | 12/1001 | 12/1001 | 12/1001 | 12/1001 | 12/1001 | 12/1001 | 12/1001 | 12/1001 | 12/1001 | 12/1001 | 12/1001 | 12/1001 | 12/1001 | 12/1001 | 12/1001 | 12/1001 | 12/1001 | 12/1001 | 12/1001 | 12/1001 | 12/1001 | 12/1001 | 12/1001 | 12/1001 | 12/1001 | 12/1001 | 12/1001 | 12/1001 | 12/1001 | 12/1001 | 12/1001 | 12/1001 | 12/1001 | 12/1001 | 12/1001 | 12/1001 | 12/1001 | 12/1001 | 12/1001 | 12/1001 | 12/1001 | 12/1001 | 12/1001 | 12/1001 | 12/1001 | 12/1001 | 12/1001 | 12/1001 | 12/1001 | 12/1001 | 12/1001 | 12/1001 | 12/1001 | 12/1001





#### ☐ Harmonics (2)

The device can control simultaneously the magnitude of the first 50 harmonics and 20 free harmonic per phase. This free ones allows the generation of sub-harmonics, inter-harmonics and high frequency harmonics up to the 50th, setting both the magnitude and phase delay.

#### Sequence

The User Interface Software integrates a Sequence Editor to create automatic test sequences, save them for future use and import them in .CSV files. A smart data logger can be activated from the LCD of the unit to record automatically the resulting voltage and current measurements with a time resolution of 400 ms.


#### Power and Impedance

The active and reactive power of each phase is independently controlled. In Impedance mode, the device emulates an RLC load allowing to parametrize resistance, inductance and capacitance per phase making this device suitable for Anti-Islanding test of grid converters.

#### ■ Multichannel (4)

Enabling the Separated Channel Control converts the device in three functionally independent DC Bidirectional Power Supplies, sharing the common negative rail. Each channel can have a different status (DN, OFF, Warning, Alarm), Operation Mode (see Range and Specifications table), Setpoint, Ramp and Limits.

cinergia

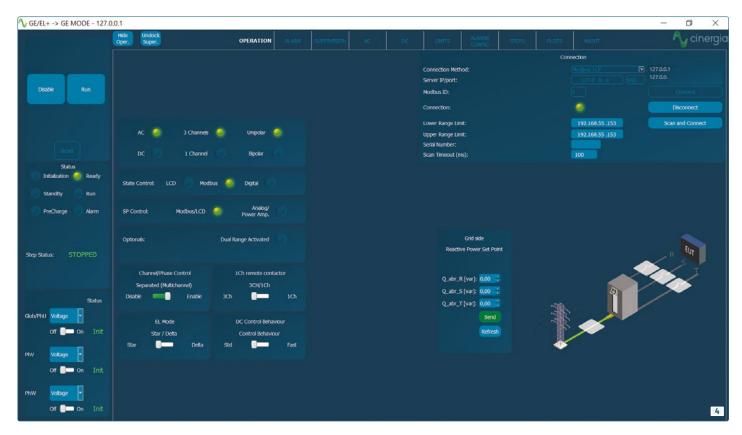





#### ☐ Steps Mode (3)

Step test files are saved and executed by the DSP allowing deterministic timing with a resolution of 68µs. The user gains access to all registers of the device to create complex test sequences which run directly in the converter without the need of an external computer.

#### Battery Pack Testing (5)

Enables the user to precisely control the charge, discharge and cycling of a Battery. Basic parameters include the charge/discharge current, fast charge and floating voltages while Advanced parameters add Energy (Ah) and Time as transition conditions. Profiles for each Battery technology can be saved and imported in .CSV files.

#### ■ Disturbance Generation

The steps mode includes predefined easyto-use test panels. The AC faults panel is a powerful yet intuitive editor which allows generating and configuring flicker. Specific profiles can be saved in .csv files, modified, and reused by importing an existing one.

#### Battery Emulation

The B2C+ integrates a mathematical model to emulate the voltage behaviour of a real battery pack. The output voltage will change as a function of the SOC and Current. By configuring the provided parameters, the voltage profile can be adjusted to match different technologies: Lilon, NiMH, NiCd, Pb, Flux, etc.

#### ☐ Linear & Non-Linear

The capacity to emulate linear and non-linear loads is one of the main features of the 40 Electronic Load. Through our intuitive control software, the magnitude of harmonics can be set and different types of loads can be generated.

#### PV Panel Emulation (6)

Based on the single-diode equivalent circuit of a PV cell and the series-parallel connection of cells to form a panel. A Runtime functionality allows the simulation of a complete day by launching different irradiance and temperature setpoints from a .csv file, enabling the user burn-in and functional tests of PV Inverters.

#### □ Parallel Mode

The device can be controlled in parallel mode where all phases are short-circuited internally. This mode it's suitable for single-phase applications. To increase the total power of the solution, the device can be connected in parallel\* with multiple devices.

#### IEC Testing

Software includes a library supporting IEC compatible tests. The profiles defined in the standards are preloaded in the software for a user friendly execution and edition. Currently the following standards are available: IEC61000-4/11, IEC61000-4/13, IEC61000-4/14, IEC61000-4/28.

#### Regenerative Power Electronic Solutions

### cinergia

Can Baletes 7, Nau A 08310 Argentona Barcelona (Spain) +34 934 864 358 info@cinergia.coop

Follow us on: Youtube, LinkedIn, Twitter